

NEXTECH

QM3882



Wired Reversing Camera with 7" LCD

Instruction Manual

MONITOR:



1	Dimmer Sensor Window	5	Power Button	9	R/C Window
2	Down Button	6	Channel 1	10	AV-IN
3	Menu Button	7	Channel 2	11	Bracket Knob
4	Up Button	8	Channel 3		

CAMERA:

- QC3536:
12V Infrared Reversing Camera
with Mounting Bracket
- CCD, 120° Viewing Angle
- High Resolution Camera



MONITOR SPECIFICATIONS:


Display:	7"
Aspect Ratio:	16:9
Luminance:	300cd/m ²
Resolution:	800 x 480 RGB
Audio & Video:	3 ways video input, 2 ways audio input, 1 AV input from the front panel
System:	PAL/NTSC (Automatic)
Voltage:	12-24V DC
Language:	English, Chinese
OSD Menu:	Display menu, Brightness, Colour and Contrast adjustments
Built-in Speaker:	Yes
Bracket Accessories:	U type bracket
Sunshade:	Included and removable

CAMERA SPECIFICATIONS:

Sensor:	SHARP 1/4 CCD
Resolution:	420 TV Line
Illumination:	0.5Lux IR night vision
Viewing Angle:	120°
Images:	Mirror & Original image
System:	PAL/NTSC
Waterproof Class:	IP68, Aluminium alloy shell
Anti-shock Class:	4G
Power Supply:	12V-24V DC
Maximum Current:	<250mA
Connector:	4 pin/RCA
Working Temperature:	-30°C to 70°C
Dimensions:	86.5(W) x 77(H) x 75(D)mm



CONNECTION:

4 pin (7")


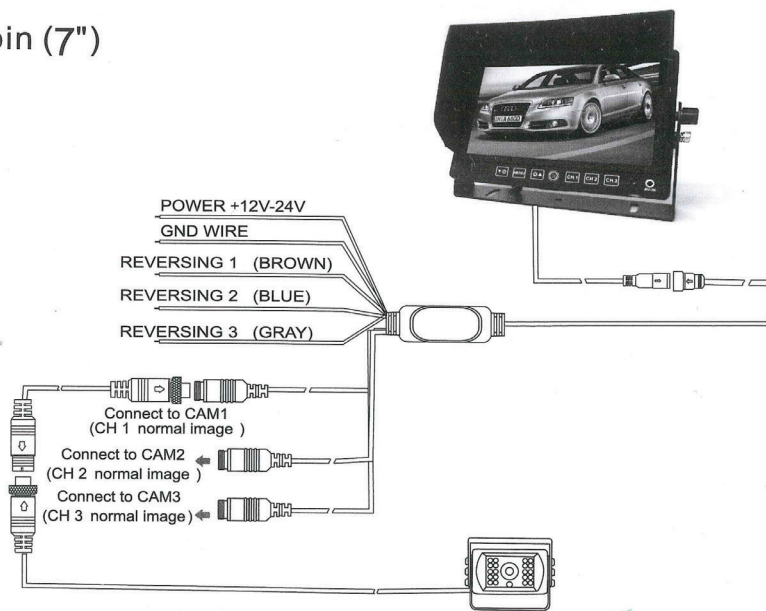


MONITOR STANDARD INSTALLATION:



1. Remove the screws from the side. Place the U-bracket where desired and lock with screws as shown in the pictures.





2. Place the monitor onto the U-bracket and tighten with screws.



3. Once the installation is completed, the monitor can be tilted 30° up or down.

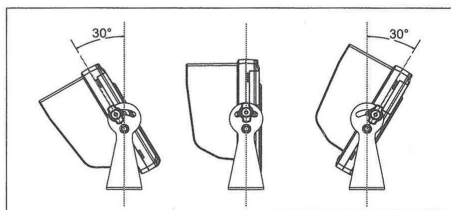

BOX CONTENTS:

Power cable*1	4pin with adaptor leads *1
	
AV-IN Cable*1	Sun shade *1
	
Bracket Accessories*1	Hexagon wrench *1
	

Distributed by:
Electus Distribution Pty Ltd
46 Eastern Creek Dr,
Eastern Creek NSW 2766 Australia
Ph 1300 738 555
Int'l +61 2 8832 3200
Fax 1300 738 500

www.electusdistribution.com.au

Made in China