

# RESPONSE

QM3845



## SPARE WIRELESS CAMERA

TO SUIT QM3844

## INSTRUCTION MANUAL

Normally, the monitor is successfully paired with the backup camera before leaving the factory, factory default successfully paired at the channel of CAM1. Only below situations need to do pairing

1. When the current camera needs to be replaced due to malfunction or damage, the new backup camera need to pair with the current monitor.
2. Add new backup camera(max 4 cameras) for split screen display, new backup cameras need to pair with the current monitor.
3. The current camera lost signal with current monitor, need to re-pairing the camera and monitor for well connection.

Monitor and camera (with "PAIR" button on backside) pairing instructions


Please finish pairing before installation

1. First make sure to connect the power supply of the monitor and camera respectively, then short press monitor  button to switch to CAM2 channel or CMA1/CMA3/CMA4 channel.


2. It will show CAM2 mark at the left top of monitor display like below picture



### Connection:

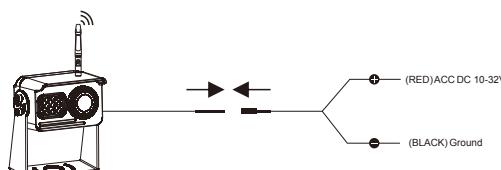

### Fixed Position:

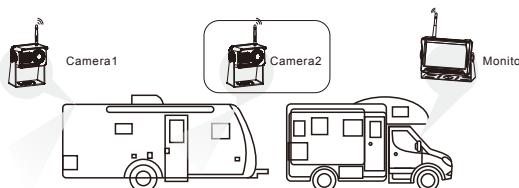

(Due to the different installation positions of different vehicle types, this picture is just for reference.)

### Pairing instruction:

3. Short press monitor "MENU"  button to enter Menu, and select "PAIRING"  icon, short press monitor "OK"  button to confirm, pairing starts, you will have 30 seconds for pairing. Then long press 3 seconds then release "PAIR" button on the backside of camera which need pairing, image will be displayed after pairing complete.

Repeat above steps, and finish pairing of the rest cameras.

1. Adding CAM requires one-to-one pairing after power-on
2. Only after one camera is paired successfully, can the next camera be powered on and paired.

3. Exchange the sequence of the display position of the CAM on the monitor, could power off the other cameras, and power on the paired camera and pair with the display position of the CAM on the monitor.

4. When pairing successfully, short press monitor  button to switch to split screen pictures  
Remarks: when pairing starts, you need to use the monitor to pair successfully within 30 seconds after the CAM is powered on, otherwise the CAM will automatically exit the pairing mode after 30 seconds, at this time, you need to disconnect the power of the CAM and re-power to pairing.



### Specifications:

#### Camera:

Operating Frequency:	2.4GHz~2.4835GHz
Power Supply:	DC 10-32V
Power consumption:	150mA/12V
Latency:	Less than 200ms
Image Sensor:	1/2.7" HD
View angle:	120°
IR Control:	Smart IR-CUT 650nm Day/850nm Night Auto
Transmission Range:	500mtrs (1650ft) line of sight
IP Class (Protection type):	IP69k, waterproof
Operating temperature:	-40°C~+70°C
Storage temperature:	-40°C~+80°C
Size	78x64x50mm

### WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:

Electus Distribution

Address 46 Eastern Creek Drive, Eastern Creek NSW 2766

Ph. 1300 738 555